

Инкубатор SURETEMP, H2505

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: bkg@nt-rt.ru || сайт: <https://benchmark.nt-rt.ru>

The new SureTemp™ Incubator series provides the highest level of temperature control with uniformity and stability levels that are unmatched by competitive models in the same class.

Each incubator is equipped with the SureCheck™ data logging system for verification of chamber temperature. The SureCheck system records temperature data points as often as every 60 seconds and stores this information on a flash drive. The data can then be viewed and saved using the included the SureCheck software. The recorded data can also be used to plot temperature points on a graph or exported to a spread sheet program for verification or storage/record keeping.

Unlike other laboratory incubators, the SureTemp series offers “Dual-Convection” technology, allowing users to choose between mechanical convection mode* (for exceptional temperature uniformity) or gravity convection mode* (for longer incubations where airborne contamination or drying of samples may be an issue). The heating elements are strategically located on multiple sides of the chamber and contents can be viewed with the separate inner glass door without disrupting the temperature environment.

** Mechanical Convection: Incorporates optimally positioned heating elements in conjunction with an internal chamber fan to control the internal temperature.
Gravity Convection: Eliminates any airflow from the chamber, relying solely on the heating elements and gravity to control the internal temperature.*



H2505-40	
Volume	40 Liters
External:	22.4 x 23.3 x 22.8 in 57 x 59.2 x 58cm
Chamber:	13.7 x 13.7 x 13.7 in 35 x 35 x 35cm
Weight:	42 kg / 92.5 lbs



H2505-70	
Volume	70 Liters
External:	26.4 x 23.3 x 26.8 in 67 x 59.2 x 68cm
Chamber:	17.7 x 13.7 x 17.7 in 45 x 35 x 45cm
Weight:	62kg / 136.5 lbs




H2505-130	
Volume	130 Liters
External:	30.3 x 27.2 x 30.7 in 77 x 69.2 x 78cm
Chamber:	21.7 x 17.7 x 21.7 in 55 x 45 x 55cm
Weight:	70 kg / 154.5 lbs

Technical Data:

Temperature Range:	Ambient +5 to 75°C
Temperature Accuracy:	±0.25°C*
Temperature Uniformity:	±0.25°C*
Temperature Increment:	0.1°C
Temperature Stability:	0.1°C*
Time Range:	1 min. to 99 hours 59 min. (or continuous)
Chamber Material:	Stainless Steel
Electrical:	115V or 230V, 50-60Hz 40L: 420W, 70L 520W, 130L: 570W

* Specification provided with a set temperature of 37.0°C in the mechanical convection mode.

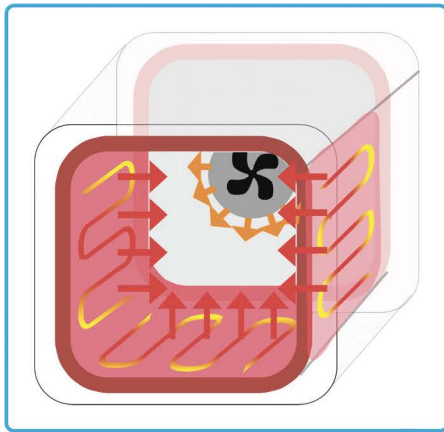

Advanced Heating Technology:

The SureTemp Incubators™ utilize a unique heating technology to ensure fast ramping times with high levels of uniformity and minimal temperature fluctuation.

Independent heating elements create an evenly distributed, air jacket that surrounds the entire chamber. In gravity convection mode (fan disabled), this results in uniformity levels within 0.7°C and fluctuations of less than 0.8°C.

When the fan is activated, the microprocessor automatically adjusts the heat distribution of each element. The elements now work in conjunction with the increased air flow, resulting in improved performance levels of 0.25°C (uniformity) and 0.1°C (fluctuation).



Internal Chamber:


The stainless steel chamber ensures rapid and uniform thermal transfer, while the smooth-mirrored finish results in easy cleaning/decontamination. The included shelves (also constructed of stainless steel) are adjustable in height, providing the flexibility to hold a wide variety of vessels.

The chamber conveniently includes an **internal power outlet** for connecting small instruments (shakers mixers, etc.) inside of the incubator, providing temperature controlled agitation. The unique design of the outlet provides worldwide use, accepting USA, European and all common plug types.



SureCheck™ Temperature Data Logger:

The SureCheck data logger is included with each SureTemp™ Incubator. Simply insert a USB flash drive (memory stick) and use the up and down keys to choose the desired recording interval. The temperature will then be logged to a .csv file automatically. Intervals as small as one minute can be chosen, resulting in the temperature being recorded every 60 seconds.

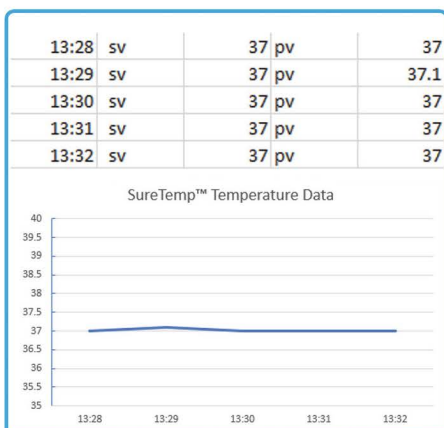

SureCheck™ Data Output:

To check the temperature log of the SureTemp™ Incubator, remove the USB drive and insert into any PC. The datafile shows set temperature, recorded temperature, the date and the time at which the recording was taken.

The data is output in the lightweight, open-source .csv file format, which allows the end user to easily graph and analyze temperature changes. The SureCheck™ output file is compatible with most regulatory data management systems, and makes integration into existing recordkeeping systems seamless.


Ordering Information:

H2505-40*	SureTemp™ Dual Convection Incubator, 40 Liters with SureTemp Data Logging Software, 115V
H2505-70*	SureTemp™ Dual Convection Incubator, 70 Liters with SureTemp Data Logging Software, 115V
H2505-130*	SureTemp™ Dual Convection Incubator, 130 Liters with SureTemp Data Logging Software, 115V
	<u>Option Accessorie Shelves (2 each included with each Incubator)</u>
H2505-40SH	Extra Shelf, stainless steel, for H2505-40
H2505-70SH	Extra Shelf, stainless steel, for H2505-70
H2505-130SH	Extra Shelf, stainless steel, for H2505-130
	<u>Optional Shakers (Comptible with H2505-70 and H2505-130 Only)</u>
BR2000*	BenchRocker™ 2D (See-Saw) rocker, 14 x 12 inch platform, variable speed 2-30 rpm, 115V
B3D2300*	BenchRocker™ 3D (Nutating) rocker, 12 x 12 inch platform, variable speed 2-30 rpm, 115V
BT302*	Orbi-Shaker™ JR. Orbitals shaker, 9.5 x 8 inch platform, variable speed 50-300 rpm, 115V (Optional flask clamps & platforms available, visit www.benchmarkscientific.com for a complete listing.)
	* 115V with US plug. For 230V (with EU plug), please add (-).

Also Available:

INCUB-SHAKER
SHAKING INCUBATORS

INCUB-SHAKER CO₂
HEAT - SHAKE - CO₂ Mini

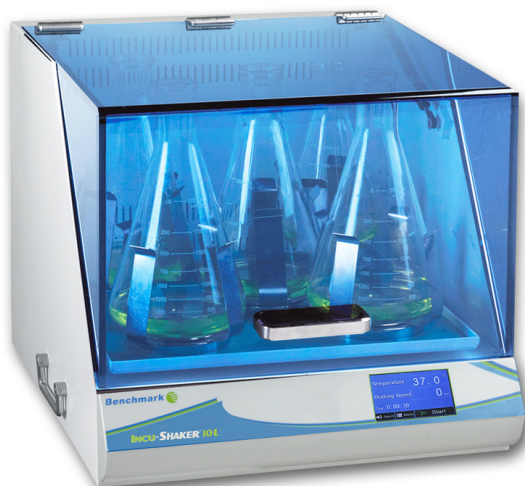

- **Exceptional temperature uniformity**
- **Three Models**
 - Incu-Shaker Mini: Capacity of 5 x 500ml (or 2 x 1L)
 - Incu-Shaker 10L: Capacity of 5 x 2L
 - Incu-Shaker 10LR: Capacity of 5 x 2L (with cooling)
- **Exchange flask clamps in one second with MAGic Clamp system (PATENTED)**

- **Integral orbital shaker, ideal for suspension cell culture**
- **Six side direct heating, provides excellent uniformity**
- **Dual beam IR sensor, precise control over CO₂**

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: bkg@nt-rt.ru || сайт: <https://benchmark.nt-rt.ru>